



# JBL Charge 2 Plus Bottom USB Ports and Aux Port Replacement

Replace the Bottom usb ports and aux port

Written By: John Reynolds



## INTRODUCTION

This guide can be used to replace your USB ports and aux cable.

---



### TOOLS:


- [Metal Spudger](#) (1)
  - [Phillips #1 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Bottom usb ports and aux port



- Flip the device so the bottom is facing you.
- Remove the bottom pad with a nylon or metal spudger.

## Step 2

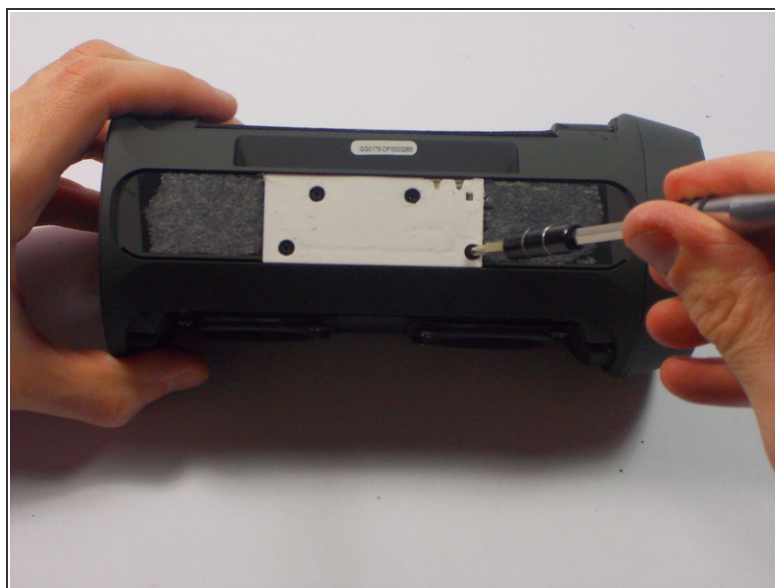

- Remove the 4 screws that hold the white cover.





## Step 3




- Slide under the cover and remove it.

## Step 4

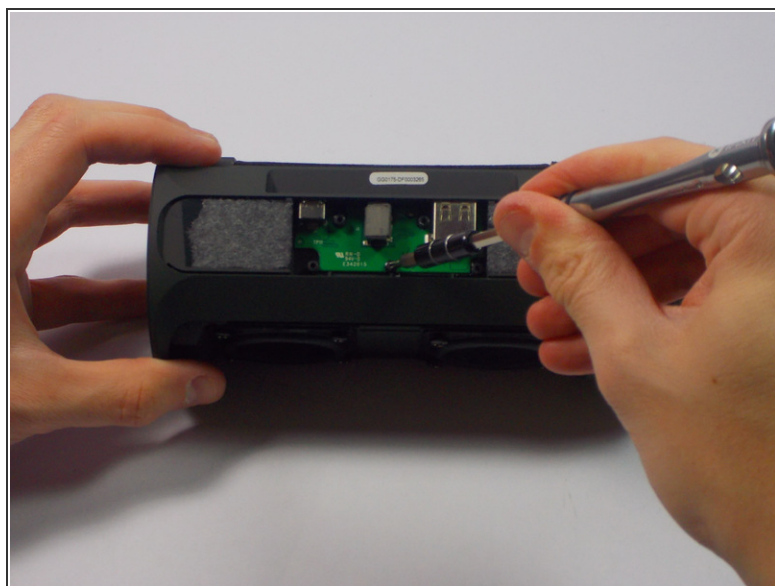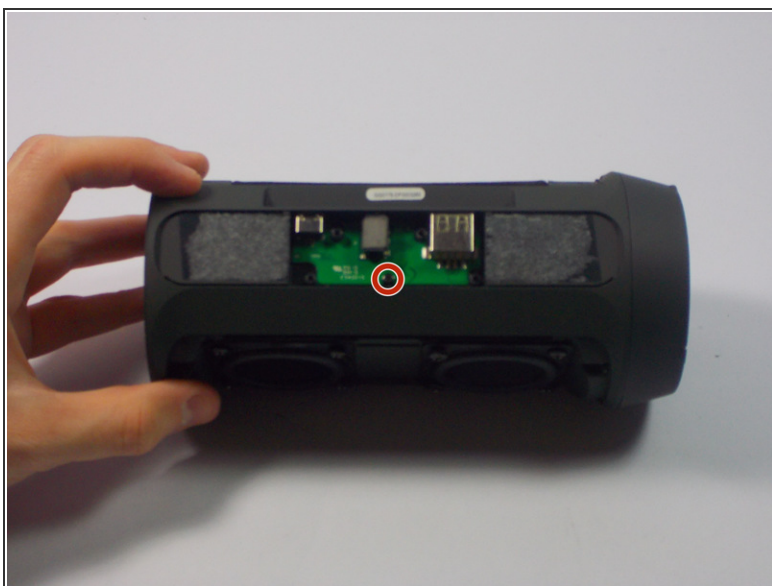



- Remove the one screw holding the circuit board.

## Step 5

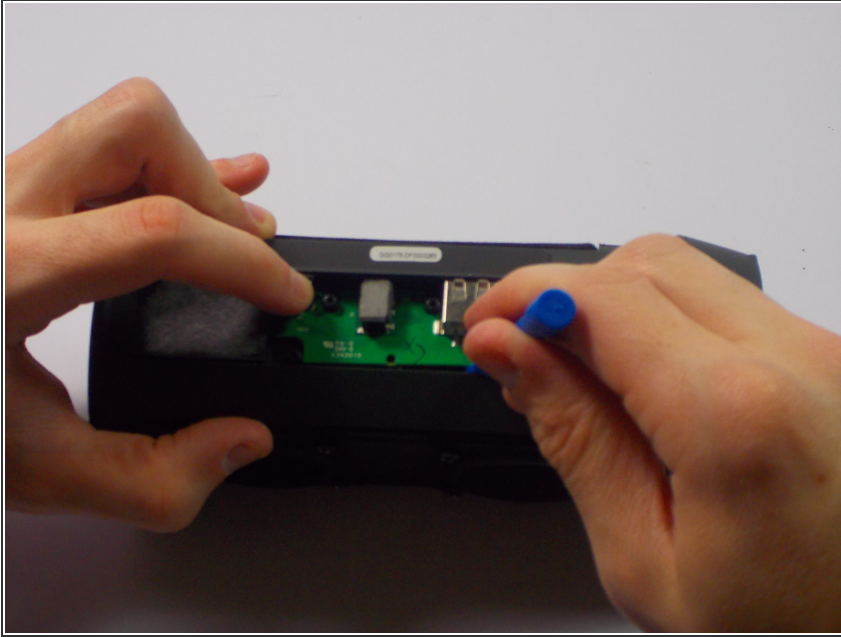

- Pry the board with the plastic opening tool.

## Step 6

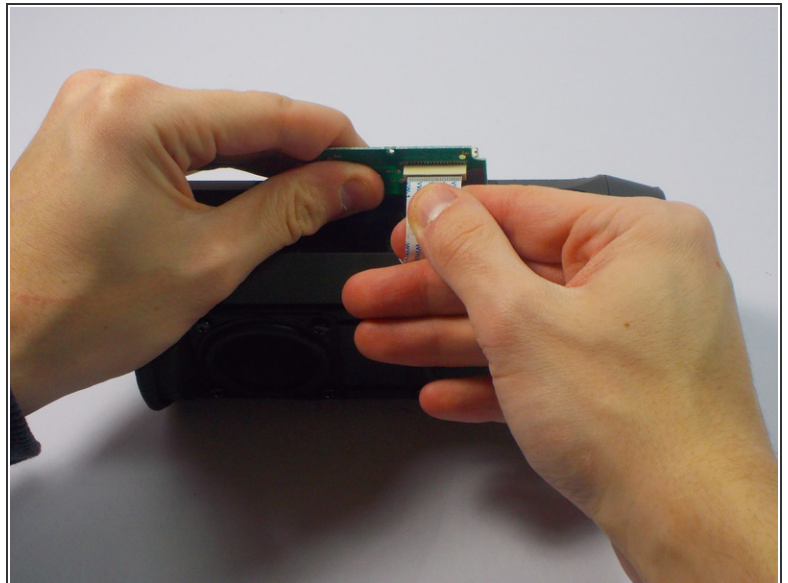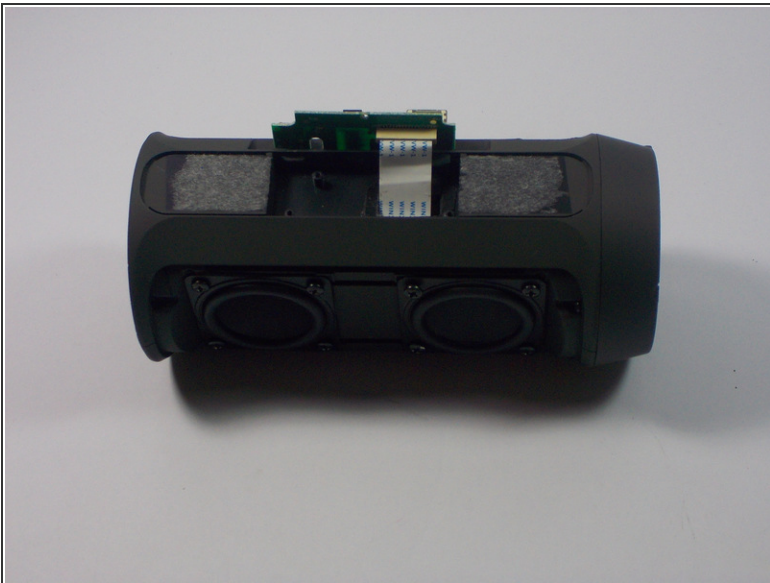

- Slide the ribbon gently out of the connector.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 05:46:09 AM.

